

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>G11B 33/04</b>	<b>A1</b>	(11) International Publication Number: <b>WO 97/20315</b>
		(43) International Publication Date: <b>5 June 1997 (05.06.97)</b>
(21) International Application Number: <b>PCT/NL96/00459</b> (22) International Filing Date: <b>20 November 1996 (20.11.96)</b> (30) Priority Data: <b>1001698 20 November 1995 (20.11.95) NL</b> (71) Applicant (for all designated States except US): <b>MONTAN NEDERLAND B.V. [NL/NL]; Oud Loodsrechtseidijk 135, NL-1231 LT Loosdrecht (NL).</b> (72) Inventor; and (75) Inventor/Applicant (for US only): <b>HEILIGERS, Joannes, Hermanus [NL/NL]; Oud Loodsrechtseidijk 135, NL-1231 LT Loosdrecht (NL).</b> (74) Agents: <b>SMULDERS, Th., A., H., J. et al.; Vereenigde Octrooibureaux, Nieuwe Parklaan 97, NL-2587 BN The Hague (NL).</b>		(81) Designated States: <b>AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</b>  <b>Published</b> <i>With international search report.</i> <i>In English translation (filed in Dutch).</i>

(54) Title: **ASSEMBLY OF A NUMBER OF PLATE-SHAPED DATA CARRIERS AND A STORAGE DEVICE**

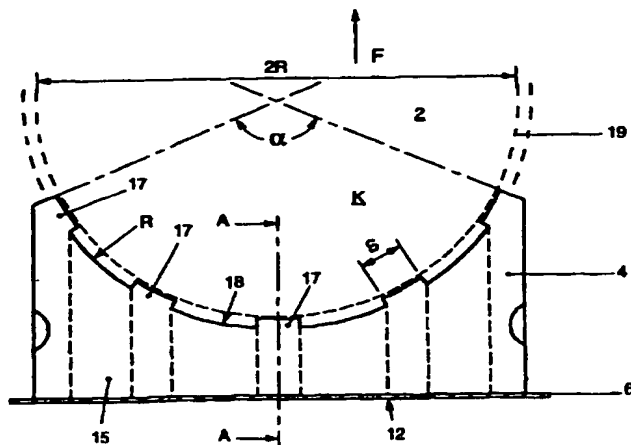

(57) Abstract

An assembly of at least one plate-shaped data carrier and a box-shaped storage device, wherein the storage device comprises two pivotally connected closing parts, which, in a closing position, together determine a receiving space for the or each data carrier and can be brought into an opened position for positioning or removing the or each data carrier, wherein receiving means comprising resilient clamping projections are included for clampingly securing the or each plate-shaped data carrier, which can together be accommodated within the storage device, wherein the resilient clamping projections extend on either side of a groove, wherein the groove is adapted to receive at least a portion of a circumferential edge of the data carrier, and wherein the clamping projections are adapted to engage either side of the part of the data carrier that is received in the groove, wherein the data carrier is withdrawable from between the clamping projections through a force in a direction approximately parallel to the plane of the data carrier.

BEST AVAILABLE COPY

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LJ	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

Title: Assembly of a number of plate-shaped data carriers and a storage device.

The invention relates to an assembly of at least one plate-shaped data carrier and a box-shaped storage device therefor according to the preamble of claim 1. Such an assembly is known from European patent application 0 420 350.

5 In the storage device in the known assembly, the first closing part is box-shaped, provided with a bottom and raised walls. The second closing part is cover-shaped and can be closingly fitted against the first closing part. The first closing part is provided, adjacent a central area thereof, with resilient fingers arranged in circular form and extending  
10 from the bottom, which fingers can engage through a central opening of the data carrier to retain the data carrier within the walls in a position approximately parallel to the bottom face mentioned. Hence, when the cover-shaped second closing part is being closed over the first closing part, the data  
15 carrier is stored within the storage device so as to be protected against influences from outside. After the first closing part has been swivelled aside, the data carrier can be removed from the known storage device by engaging the data  
20 carrier at the circumferential edge thereof, pressing the resilient fingers at least partially away in the direction of the center of the circle formed thereby and pulling the data carrier away from the resilient fingers in a direction at right angles to the bottom face. When the data carrier is  
25 being positioned, it is simply pressed with its central opening over the resilient fingers, which, accordingly, are temporarily pressed away to allow the data carrier to pass.

This known storage device has a number of drawbacks. For instance, in the known storage device, only data carriers can  
30 be stored that are provided with a central opening. Moreover, it is not easy to remove from the resilient fingers such a data carrier disposed thereon. There is little space for engaging the circumferential edge and, moreover, the data carrier should be gripped with one hand, while the resilient  
35 fingers are pressed away with the other hand, so that always

two hands are required for removing the data carrier. This moreover involves a great chance that the user touches the data-carrying part of the data-carrying part of the data carrier, so that damages may be caused thereto. Further, the resilient fingers should be on the one hand sufficiently flexible to allow the data carrier to pass, and on the other sufficiently stiff to be able to retain the data carrier. Because of this combination of requirements, the freedom of choice of material for the relevant first closing part wherein the resilient fingers are integrally formed is considerably limited to relatively costly materials. Further, the resilient fingers are not sufficiently durable to enable a long and repeated use thereof. When the fingers break off, the data carrier can no longer be properly secured, which renders the storage device unusable.

The object of the invention is to provide an assembly of the type described in the preamble, wherein the drawbacks mentioned are avoided, while the advantages thereof are retained. To that end, an assembly according to the invention is characterized by the features of claim 1.

Because in an assembly according to the invention, the clamping projections engage a plate-shaped data carrier along a portion of the circumferential edge thereof, a storage device within the assembly can be used for storing plate-shaped data carriers, independently of the presence of a central opening. Because the clamping projections engage the data carrier on either side, i.e. against the flat side faces thereof, the data carrier can be properly clamped and yet readily removed, without the clamping projections having to undergo a substantial deformation for that purpose. When a data carrier is being positioned, the clamping projections are pressed apart only slightly and thus provide the clamping of the data carrier. When the data carrier is being removed, the resilient clamping projections slide over the side faces of the data carrier until it is released therefrom, whereupon the clamping projections rebound into their original position.

Thus, the data carrier can readily be positioned and removed with one hand.

A further advantage of the clamping direction of the clamping projections is that they can be of a flat design in a direction at right angles to the deformation direction, while in the known device, the clamping projections should be slightly bent in a direction at right angles to the deformation direction. Consequently, the resilient clamping projections in a storage device according to the invention can be of a relatively wide design, without this causing the action thereof, in particular the force required for the deformation, to increase unacceptably, so that the resilient clamping projections in a storage device according to the invention can be of a stronger and more durable design. In addition, engagement of the data carrier along a circumferential edge offers the advantage that a larger surface area is available for gripping by means of the clamping projections and, moreover, that the clamping projections engage the data carrier from two sides in directions towards each other, so that in order that the data carrier can be received in a sufficiently fixed manner all the same, relatively little clamping force per clamping projection or at least per surface is required. For this reason, too, the deformations in the clamping projections can be kept relatively limited, which considerably increases the durability of the assembly.

In an advantageous embodiment, an assembly according to the invention is characterized by the features of claim 2.

By engaging the data carrier at a portion thereof that does not carry any data, the data carrier is readily prevented from being damaged in such a manner that data are lost, also when the clamping projections are slid across the surfaces of the data carrier.

In a further advantageous embodiment, an assembly according to the invention is characterized by the features of claim 3.

The arrangement of a series of clamping projections along each longitudinal side of the groove has the advantage that the data carrier is engaged at a number of locations, while, moreover, the clamping projections are not unpleasantly stiff, because, viewed in the direction of the groove, parallel to the plane of a data carrier received therein, they are relatively short relative to the length of the groove. By positioning the clamping projections opposite each other to form pairs, the advantage is obtained that the data carrier is not deformed by the clamping projections, because the pressure force of each clamping projection is compensated by the pressure force of the opposite clamping projection.

In a preferred embodiment, an assembly according to the invention is characterized by the features of claim 5.

Engagement of the data carrier at the two flat sides thereof is particularly favorable for the positioning and/or removal thereof, in particular when positions of the data carrier at which it can be engaged carry no data, at least not in a manner in which it can be damaged. Thus, the force required for positioning or removing can be supplied more simply. An additional advantage of such embodiment is that the data carrier is visible from two sides, so that information provided on either side thereof remains visible. Moreover, when data carriers used in the known assembly are used within an assembly according to the invention, this offers the advantage that for instance a finger of a user or a pick-up means can engage through the central opening for picking up or positioning the data carrier. Thus, contact between the user and at least the or each data-carrying part of the data carrier can readily be prevented, while the data carrier remains nevertheless readily manipulable.

During the use of an assembly according to the invention, in particular according to this embodiment, a data carrier can for instance directly be brought from the storage device into a reading device and vice versa, for instance in an automatized device. Also during the production of the assemblies, the

fitting of the or each data carrier in the storage device can thus be provided in a simple and economical manner.

In an embodiment according to claim 6, a storage device according to the invention is particularly suitable for  
5 storing circular discs, such as compact discs (CD, CD-i, CD-ROM), video discs, long-playing records and singles, and the like.

In an embodiment according to claim 6, a storage device in an assembly according to the invention is particularly  
10 suitable for storing substantially rectangular data carriers, such as chip cards, magnetic cards, or credit cards, or computer diskettes and the like.

In a particularly advantageous embodiment, an assembly according to the invention is characterized by the features of  
15 claim 8, in particular of claim 9.

By disposing the receiving means in an intermediate part which is pivotally connected to one of the closing parts, a simple construction of the storage device is obtained, wherein different intermediate parts can be arranged side by side for  
20 receiving a series of data carriers. In this connection, it is particularly advantageous when the two closing parts are pivotally connected to the intermediate part or, if several intermediate parts are included, at least to the adjacent intermediate parts. This enables the closing parts on either  
25 side of an intermediate part to be pivoted aside, so that the data carrier is free on either side. This is advantageous in particular if the two closing parts can be pivoted approximately in the same plane, because a storage device according to the invention can then be placed with the closing  
30 parts on a flat face, while the or each data carrier, received in an intermediate part, can then extend in a plane which includes an angle with the flat face on which the storage device is disposed. The data carrier is then optimally accessible to a user or to a device for the positioning or  
35 removal thereof. Moreover, a data carrier can thus be presented in an attractive manner by means of the storage device.

The or each intermediate part can be detachable connected to one or both closing parts and any other intermediate parts, which renders the intermediate part usable as receiving means for a data carrier during manipulation thereof. In a further preferred embodiment, however, an assembly according to the invention is characterized by the features of claim 11.

A storage device in such an assembly offers the advantage that it can be manufactured in one pass. Because such a storage device need not be built up from different loose parts, the manufacturing process thereof can be carried out in a simple and economical manner, also in a completely automated manner. Moreover, during use, this does not involve the danger that coupling means such as pivot pins and the like, break off, as a consequence of which the storage device would lose its function. A further advantage of such storage device is that it entirely consists of one material, so that no different parts need to be separated before recycling of the material is possible.

An assembly according to the invention is further characterized in an advantageous embodiment by the features of claim 12.

A closure of a storage device by means of closing fingers engaging an opening in the closing part enables a particularly simple operation of the storage device and can moreover be provided in the storage device in a relatively simple manner.

The invention further relates to a device, apparently intended for use in an assembly according to the invention.

To explain the invention, exemplary embodiments of an assembly will hereinafter be described, with reference to the accompanying drawings, wherein:

Fig. 1 is a top plan view of a storage device in open position;

Fig. 2 is a front view of a storage device according to Fig. 1;

Fig. 2A is an enlarged sectional view of a storage device taken on the line A-A in Fig. 3;



Fig. 3 is a sectional side elevation of a storage device according to Fig. 1, suitable for substantially circular data carriers;

5 Fig. 4 is an enlarged sectional view of a closure of a storage device;

Fig. 5 is a front and top plan view of a storage device in an alternative embodiment, with data carriers included therein;

10 Fig. 6 is a sectional side elevation of a storage device according to Fig. 1, suitable for substantially rectangular data carriers; and

Fig. 7 is a sectional side elevation of a storage device according to Fig. 1, in an alternative embodiment.

15 Fig. 1 shows a storage device 1 for a data carrier 2. A data carrier 2 to be stored can for instance be circular, such as compact discs (CD-i, CD-ROM; Fig. 3) or substantially rectangular, such as chip cards (Fig. 5). The storage device 1 according to Fig. 1 is of a one-piece construction and for instance manufactured through injection molding from a  
20 relatively environmentally friendly, recyclable plastic such as polypropene.

The storage device 1 as shown in the Figures comprises a first closing part 3, an intermediate part 4 and a second closing part 5. The first closing part 3 and the second  
25 closing part 5 are connected to the intermediate part 4 via two integrated pivots 6 adjacent the bottom side, so that the two closing parts 3, 5 are at least pivotable through an angle of 90° relative to the intermediate part 4, so that they can be pivoted from the position shown in Figs. 1-3 into a closed  
30 position shown in broken lines in Fig. 2.

The first closing part 3 has a substantially rectangular top face 7, comprises a substantially closed front edge 8 at the longitudinal edge thereof remote from the pivots 6, and comprises partially closed first sidewalls 9 at the two  
35 longitudinal edges adjoining that front edge. The second closing part 5 likewise has a rectangular top face 10 and comprises an upright second sidewall 11 at two opposite

longitudinal edges. In the closed position, the second sidewalls 11 abut on the outside against the first sidewalls 9, while the front edge 8 abuts, by an upper edge thereof, against the inside of the top face 10 of the second closing part 5. The bottom side 12 of the intermediate part 4 constitutes the fourth wall of the storage device 1 in closed condition, as a result of which it is closed in an entirely waterproof and dustproof manner. The receiving means 13 for the data carrier 2, which will be further explained hereinbelow, are included in the intermediate part 4 and, when the storage device 1 is in the closed position, are included in the inner space 14 thereof, optionally together with a data carrier received therein.

The intermediate part 4 comprises two spaced-apart wall parts 15, interconnected by transverse partitions 16. At the side remote from the pivots 6, the walls 15 comprise toothed clamping projections 17, with two clamping projections 17 being in each case positioned directly opposite each other. Enclosed between the clamping projections 17 is a groove 18 having a width B which is slightly smaller than the thickness D of the data carrier 2 that is to be stored in the storage device.

In the embodiment shown in Fig. 3, the groove 18 extends along a segment of a circle having a radius R approximately corresponding to the radius R of a circular data carrier to be received therein, such as a CD. The circular segment includes an angle  $\alpha$  of less than  $180^\circ$ . The angle  $\alpha$  included is preferably about  $120^\circ$ , because in such an embodiment, sufficient clamping force can readily be obtained with a maximum groove length without the width of the intermediate part 4 having to be greater than the diameter  $2R$  of the data carrier 2. In the embodiment shown in Fig. 3, five pairs of clamping projections 17 are provided, but this number can of course be freely chosen. As the occasion arises, even one pair of clamping projections 17 may suffice, in which case the clamping projections may extend throughout the length of the groove 18.

In the embodiment of a storage device 50 according to the invention shown in Fig. 6, the groove 18 extends along three sides of an imaginary rectangle CK, shown in the Figure in broken lines. At the side facing the pivots 6, three pairs of  
5 clamping projections 17 are disposed along the groove 18, while along the two groove parts 18' extending at right angles thereto, one pair of clamping projections is in each case provided. In this embodiment, the storage device 50 is in particular suitable for storing data carriers having a  
10 substantially rectangular shape, such as chip cards, credit cards, magnetic cards and the like.

Fig. 4 shows, in section, a closure 23, comprising an opening 24 in the second closing part 5, adjacent the longitudinal edge, remote from the pivots, of the top face  
15 thereof. In a position corresponding to the opening 24 at least in the closed position of the storage device 1, 50, the first closing part 3 comprises two resilient fingers 25 located in the plane of the front edge 8. The resilient fingers 25 extend parallel to each other from a distance below  
20 the upper edge 26 of the front edge 8 to a position slightly thereabove, with two guide spheres 27 being provided at the top side. The opening 24 has a width such that the spheres can only be pressed therethrough after having been moved towards each other slightly. The edges 28 of the opening 24 are  
25 upwardly inclined so that the opening at the top side facing away from the first closing part 3 is larger than at the side facing the first closing part 3. This allows the guide spheres 27, after having passed the relatively narrow bottom side of the opening 24, to rebound outwards in the direction of their  
30 original position, whereby the first closing part 3 is secured on the second closing part 5. Because the resilient fingers 25 are located in the plane of the front edge or, optionally, of the sidewalls, a large number of such closures 23 can in the first place readily be included and, moreover, they can be  
35 integrally formed therewith during the injection molding process in a cheap manner and without any additional measures. After all, the relief thereof is possible in a simple manner.

The closing parts 3 and/or 5 can comprise support means for a data carrier 2 for supporting, at a distance from the intermediate part 4, the circumferential edge 19 of the data carrier 2 when the storage device 1 is in its closed position.

5       The pivots 6 are for instance shaped as V-shaped grooves, while a relatively thin bottom part can act as deformation element.

      The closing parts 3, 5 are provided, in a conventional manner, with means for receiving text booklets, labels, 10 librettos and like added information means.

      An assembly according to the invention can be used as follows.

      In an injection molding machine, a storage device 1, 50, 70 is manufactured in one production pass and then fed to a 15 packaging line, with the closing parts 3, 5 lying flat on a conveying means and the intermediate part 4 extending approximately vertically and being open towards the top (Fig. 2). A data carrier 2 is simply inserted into the receiving means 13 by pressing a circumferential edge 19 thereof between 20 the clamping projections 17 and pushing it further in the direction of the bottom 20 of the groove 18. This causes the clamping projections 17 to be slightly pressed apart, which creates a clamping force resulting from the deformation forces. This involves the clamping projections 17 being 25 pressed against the flat outer surfaces 21 of the data carrier. The longitudinal edges 22, remote from the pivots 6, of the clamping projections 17 are beveled inwardly (Fig. 2A), as a result of which the data carrier can readily be pressed therethrough. The groove has a depth such that data-carrying 30 parts K are not reached by the clamping projections 17. Next, any books and the like can be disposed in the receiving means intended therefor.

      Because the clamping projections 17 need to be deformed only in a direction P transverse to the surface of the data 35 carrier 2, the width S of the clamping projections 17 can be chosen relatively arbitrarily, so that in each case an optimum clamping force can be obtained, depending on the data carrier

to be clamped and the possible height of the clamping projections 17. Because the wall parts 15 are spaced apart, no substantial differences in wall thickness occur in the storage device, while, moreover, relief problems of the mold are prevented, so that, in terms of injection molding engineering, the storage device is simple. As the clamping projections 17 are arranged so as to be substantially opposite each other, deformation of the edge of the data carrier 2 is prevented.

After the data carrier 2 has been inserted between the clamping projections 17, the closing parts 3, 5 are pivoted in the direction of the intermediate part 4 and the data carrier 2 so that the or each closure 23 is closed. On the outsides of the storage device, stickers or prints can for instance be provided, while they can also be embossed or be provided with a print provided through in-mold labelling. After this, the assembly is ready for use.

A user can open the closed storage device in a simple manner by pivoting the closing parts apart. This involves the or each closure 23 being automatically unlocked due to the fact that the guide spheres 27 are pressed towards each other. By pivoting the closing parts 3, 5 away, the intermediate part 4 with the data carrier 2 included therein is released. This data carrier 2 can be gripped from two sides and pulled away through exertion of a force F in the direction away from the groove 18 and lying in the plane of the data carrier 2. After the data carrier 2 has been pulled away, the clamping projections 17 rebound into their starting positions. The data carrier 2 can readily be placed back by following the above steps in reverse order.

Fig. 5 gives an alternative embodiment of a storage device according to the invention. Here, two intermediate parts 4 are pivotally connected to each other and to the first 3 and the second closing part 5 respectively. This enables two data carriers to be stored side by side in the storage device. As the two intermediate parts are pivotable relative to each other, the two data carriers can be engaged on two sides without the other data carrier being in the way. In this

manner, it is of course also possible to include several intermediate parts, side by side, to form a series of stored data carriers.

Fig. 7 shows a further alternative embodiment of a storage device 70, with data carrier 2 included therein. In this relatively simple and compact embodiment, the clamping projections 17 are directly disposed in three pairs on the intermediate part 4, so that the circumferential edge of the data carrier 2 approximately abuts against the center part 4. Hence, the groove 18 lies closely against the center part and has two interrupted walls. The projections 17 slightly diverge at their free ends 30, creating a lead-in opening for the data carrier 2 to the clamping parts 31 of the projections 17, which lead-in opening converges in the direction of the center part 4.

The invention is by no means limited to the embodiments shown in the drawings and the specification. Many variations thereto are possible. For instance, the or each intermediate part may be fixedly disposed relative to the other parts, and, moreover, two or more grooves may be included side by side in the same plane in an intermediate part, for instance for storing relatively small data carriers side by side. Further, other shapes of storage devices may be chosen, for instance partially round or oval. The or each intermediate part may be detachably connected to the closing parts, allowing the number of intermediate parts to be selectively adjusted and, moreover, allowing the intermediate part to be used as manipulating device for the data carrier, loose from the further storage device. The intermediate part 4 may be of a peg-shaped design, so that for instance by pressing together a part of the wall parts 15, the clamping projections 17 are pressed slightly apart and the data carrier 2 can be secured between the clamping projections 17 without sliding contact. Further, other materials may of course be used for the storage device, for instance completely biodegradable plastics, while in particular the closing parts may be of both transparent and opaque or entirely non-transparent design. Further, different

closures may be used for the storage device, while, moreover, means may be provided for securing the intermediate part against one or both of the closing parts. These and many comparable variations are understood to fall within the  
5 framework of the invention.

## CLAIMS

1. An assembly of at least one plate-shaped data carrier and a box-shaped storage device therefor, wherein the storage device comprises a first closing part and a second closing part, pivotally connected thereto, wherein the closing parts, in a closing position, together determine a receiving space for the or each data carrier, said receiving space being substantially closed towards the outside, and can be brought from the closing position into an opened position for positioning or removing the or each data carrier, wherein receiving means comprising resilient clamping projections are included for clampingly securing the or each plate-shaped data carrier, which receiving means can be accommodated, together with the or each data carrier positioned therein, within the storage device in the closing position, **characterized in that** the resilient clamping projections extend on either side of a groove, wherein the groove is adapted to receive at least a portion of a circumferential edge of the data carrier, and wherein the clamping projections are adapted to clampingly engage, when the data carrier is in the position in which it is received in the receiving means, either side of the part of the data carrier that is received in the groove, wherein the data carrier is withdrawable from between the clamping projections through a force in a direction approximately parallel to the plane of the data carrier.
2. An assembly according to claim 1, characterized in that the receiving means, in particular the clamping projections, engage a data carrier received therein at a portion that carries no data.
3. An assembly according to claim 1 or 2, characterized in that a series of clamping projections is included on either side of the groove, wherein the clamping projections are substantially provided opposite each other to form pairs.
4. An assembly according to any one of claims 1-3, characterized in that when a data carrier is received in the receiving means and enclosed between the box-shaped part and the cover-shaped part which fittingly abuts against and closes



said box-shaped part, the or each data-carrying part lies clear within the space defined by the cover-shaped part and the box-shaped part.

5     5. An assembly according to any one of claims 1-4, characterized in that when the storage device is in the open position, a data carrier received in the receiving means can be engaged from two opposite, flat sides.

10     6. An assembly according to any one of the preceding claims, wherein the data carrier is an at least substantially circular disc, characterized in that the groove extends approximately along a segment of a circle with an included angle of less than 180°, preferably between 60° and 150°, in particular 120°, wherein the groove has a radius which is approximately equal to the radius of the data carrier.

15     7. An assembly according to any one of claims 1-5, characterized in that the data carrier is substantially rectangular, wherein the groove, when a data carrier is included therein, extends along at least one side thereof, preferably along one full side and along a portion of two  
20     sides adjoining said side.

8. An assembly according to any one of claims 1-7, characterized in that the receiving means are included in at least one intermediate part, wherein the or each intermediate part is connected to both closing parts so that at least one  
25     of the closing parts is pivotable relative to at least one intermediate part.

9. An assembly according to claim 8, characterized in that each closing part is pivotable relative to the or an intermediate part.

30     10. An assembly according to claim 8 or 9, characterized in that at least two intermediate parts are provided, each comprising receiving means, wherein the intermediate parts are pivotally interconnected.

35     11. An assembly according to any one of the preceding claims, characterized in that the storage device is substantially manufactured in one piece, preferably through injection molding.

12. An assembly according to any one of the preceding claims, characterized in that the first closing part is provided, adjacent the longitudinal edge facing away from the second closing part, with an opening, wherein the second closing part
- 5 is provided, adjacent the longitudinal edge facing away from the first closing part, with two resilient closing fingers which can at least be partly received, with clamping action, in said opening in the first closing part when the storage device is in the closed position, to keep the storage device
- 10 in the closed position.
13. A storage device, apparently suitable for use in an assembly according to any one of the preceding claims.

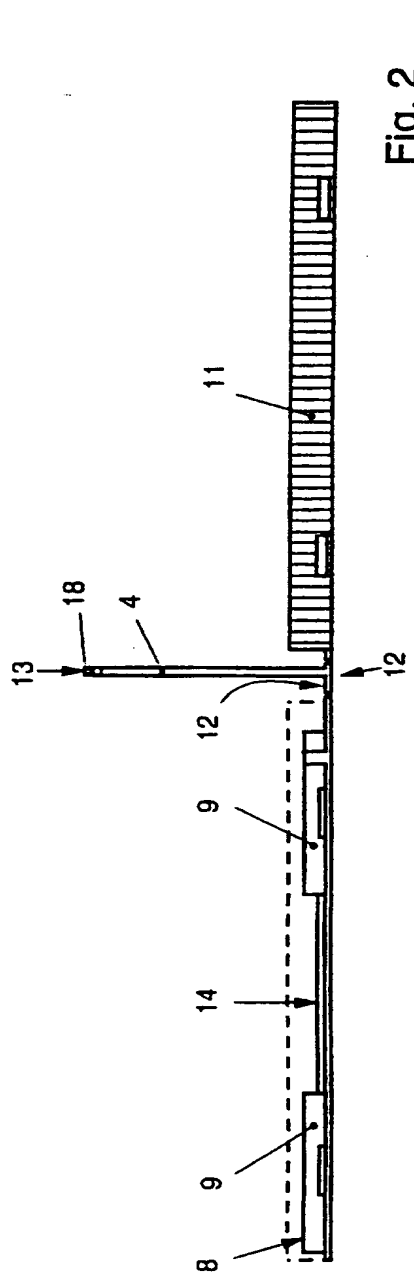


Fig. 2

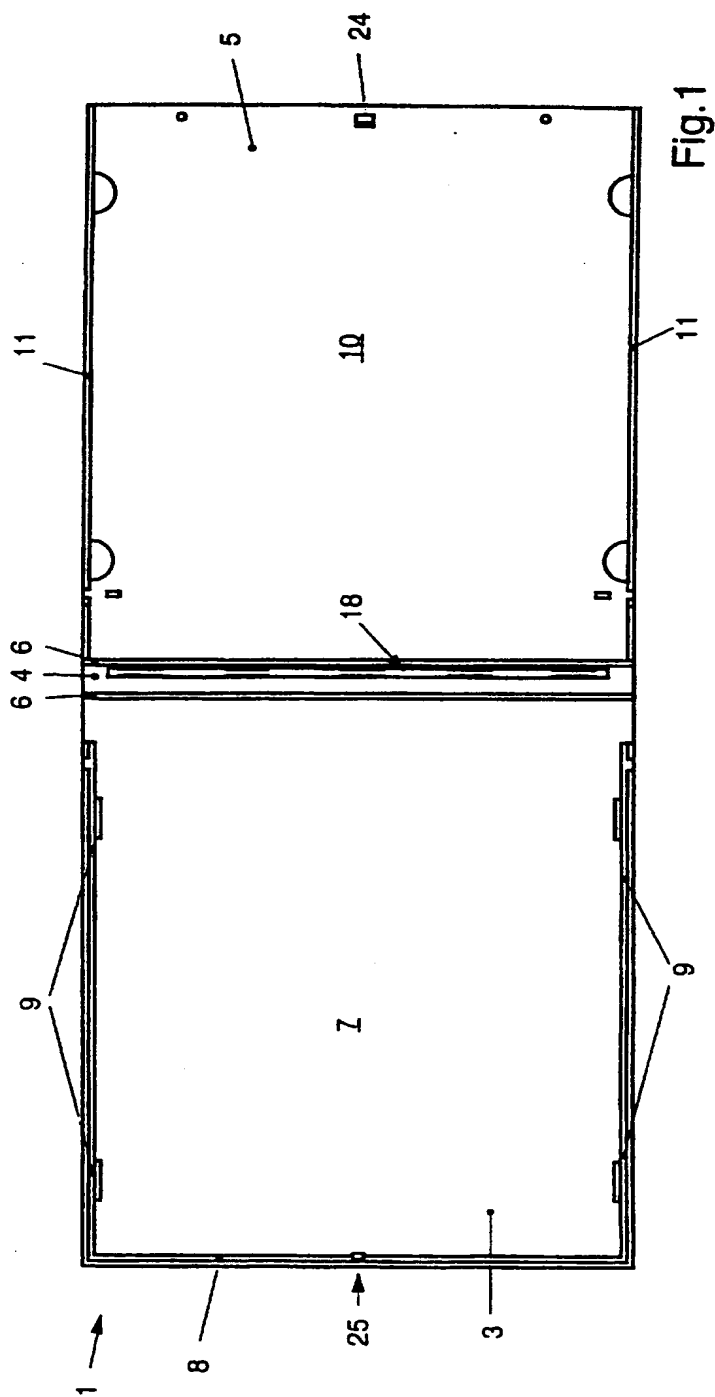


Fig. 1

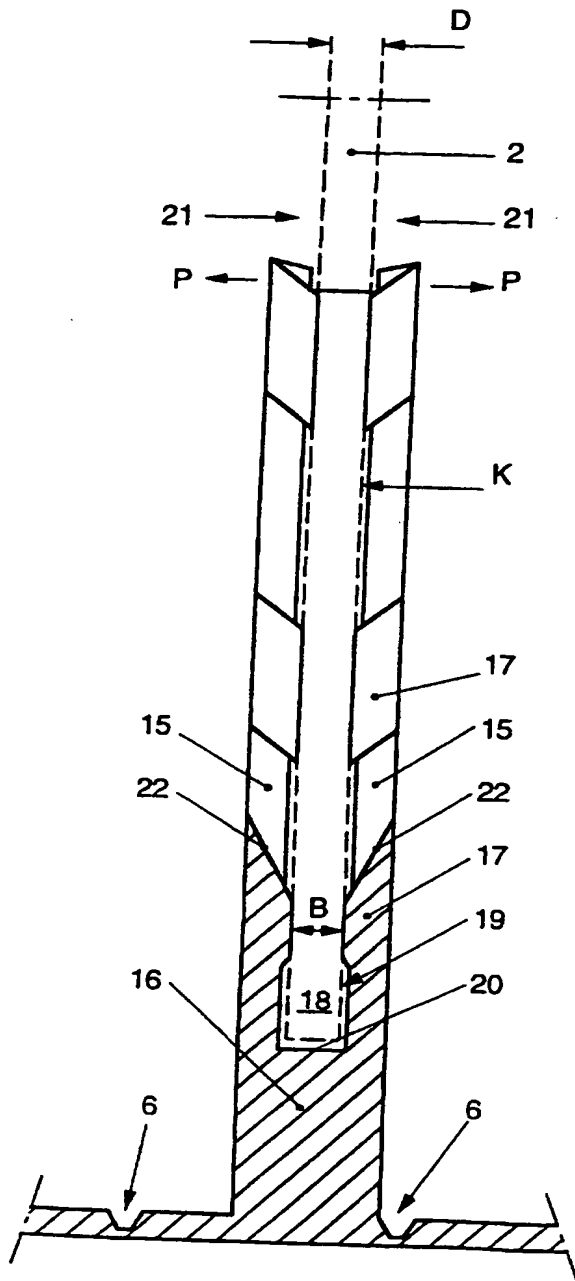


Fig. 2a

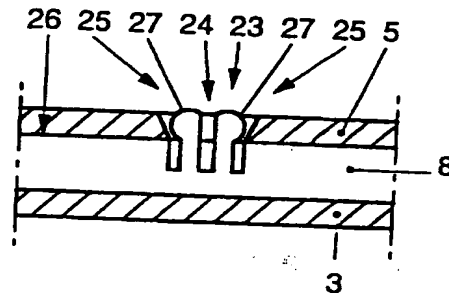


Fig. 4

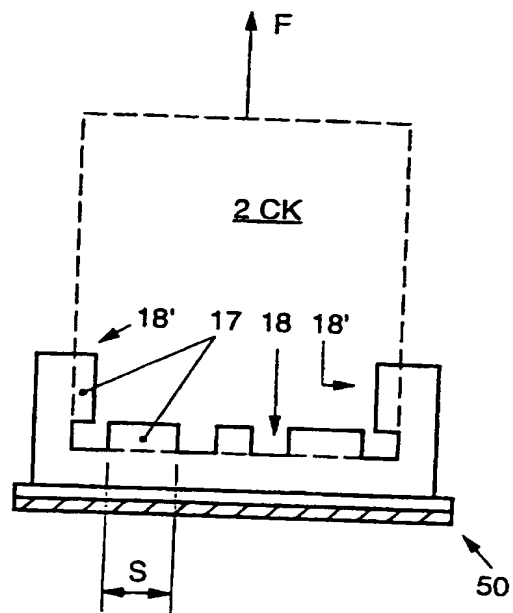
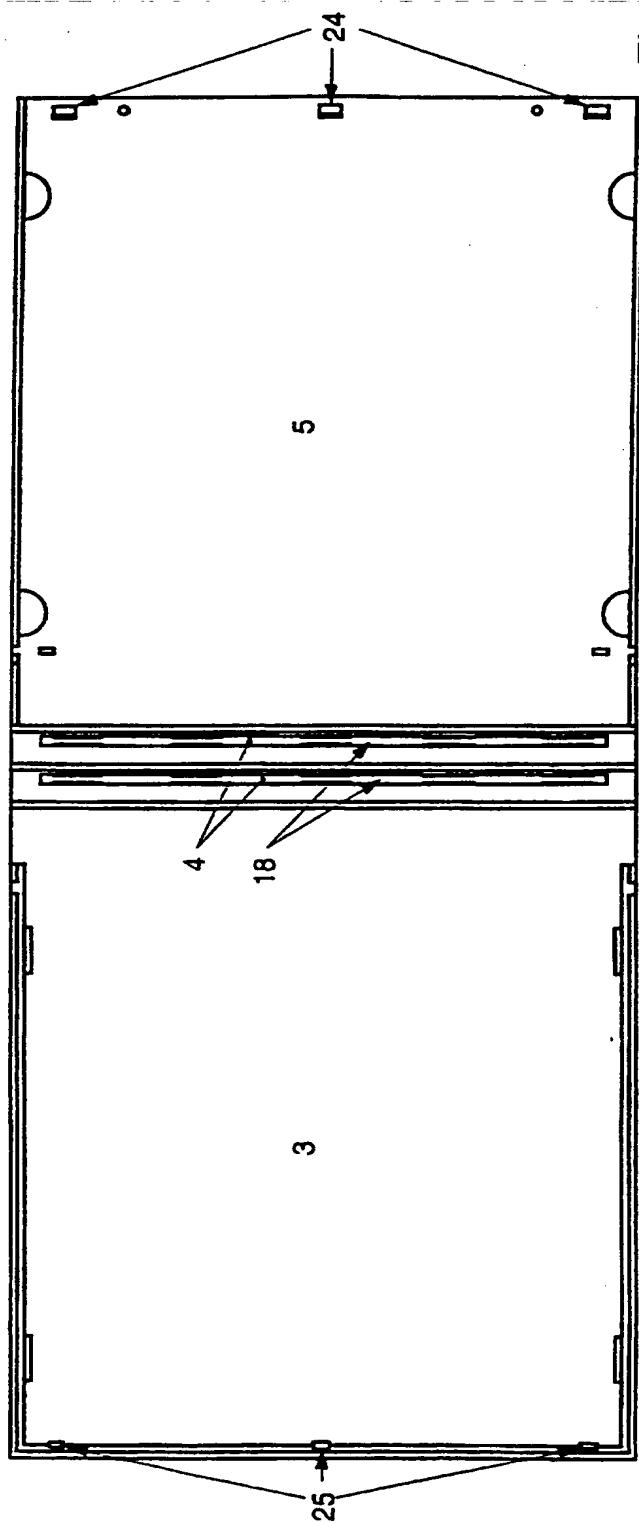
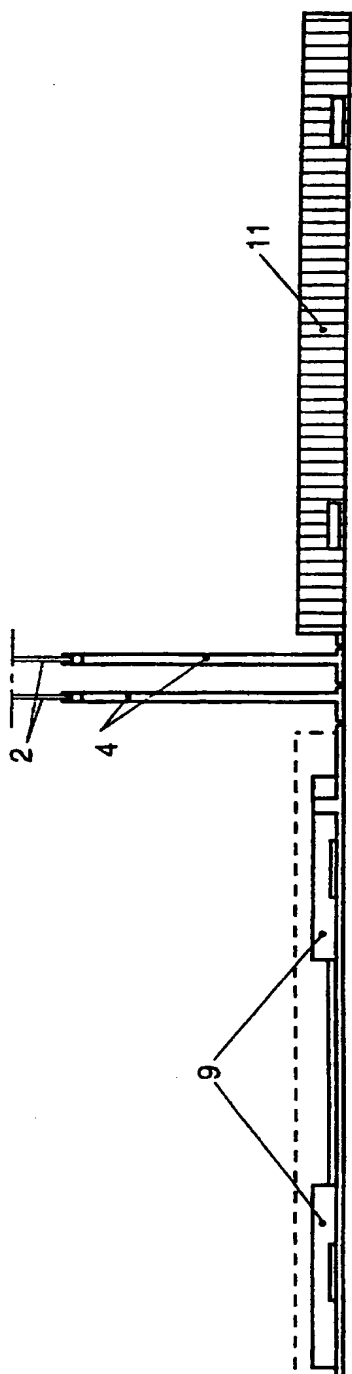


Fig. 6





**Fig. 5**

5/5

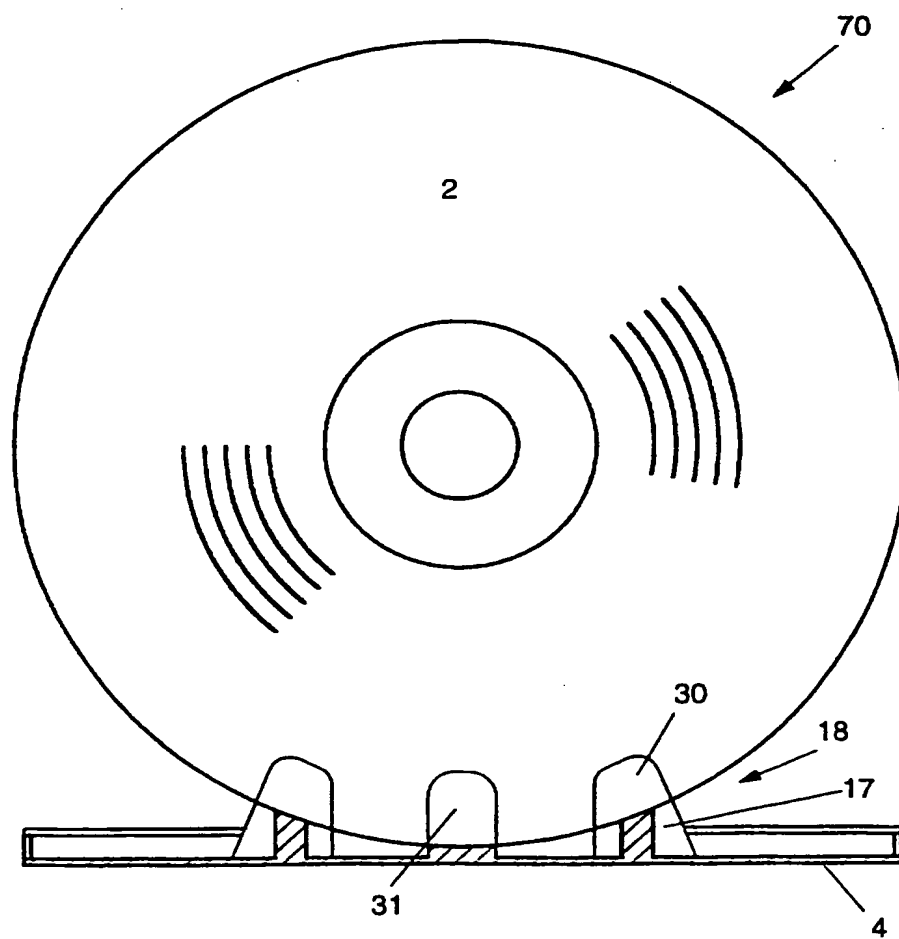


FIG. 7

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/NL 96/00459

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 G11B33/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G11B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GB 2 154 550 A (MARDON ILLINGWORTH) 11 September 1985 see the whole document	1-5,8-13
X	DE 92 15 426 U (SUN HING AUDIO EQUIPMENT MFY. LTD.) 4 February 1993 see page 8, line 18 - page 10, line 8; figures 1,2	1-6,8-13
A	EP 0 608 822 A (LUCKOW HANS JUERGEN) 3 August 1994 see column 5, line 40 - column 7, line 50; figures 9,10	1

-/--

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

17 February 1997

Date of mailing of the international search report

- 4. 03. 97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl.  
Fax: (+31-70) 340-3016

Authorized officer

Ressenaar, J-P



# INTERNATIONAL SEARCH REPORT

Intern. Appl. No.  
PCT/NL 96/00459

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EP 0 420 350 A (PHILIPS &amp; DU PONT OPTICAL ;PHILIPS &amp; DU PONT OPTICAL (DE)) 3 April 1991 cited in the application see abstract; figure 4 -----</p>	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern. al Application No

PCT/NL 96/00459

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB-A-2154550	11-09-85	NONE	
DE-U-9215426	04-02-93	NONE	
EP-A-0608822	03-08-94	DE-A- 4302236	18-08-94
		DE-A- 4341763	24-05-95
		CA-A- 2114308	28-07-94
		US-A- 5450951	19-09-95
		US-A- 5522501	04-06-96
EP-A-0420350	03-04-91	DE-A- 3932425	11-04-91
		DE-D- 69009371	07-07-94
		DE-T- 69009371	22-12-94
		HK-A- 110096	05-07-96
		JP-A- 3275483	06-12-91
		US-A- 5269409	14-12-93

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☒ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**